

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No.

PCT/US 00/00752

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5843050 A	01-12-1998	AU 1051897 A CA 2234706 A EP 0861100 A JP 2000500366 T WO 9717998 A	05-06-1997 22-05-1997 02-09-1998 18-01-2000 22-05-1997
EP 0688576 A	27-12-1995	JP 8000733 A US 5569200 A US 5782809 A	09-01-1996 29-10-1996 21-07-1998
US 5702439 A	30-12-1997	US 5522818 A US 5395334 A US 5217482 A US 5156594 A CA 2089493 A DE 9117207 U DE 69129418 D DE 69129418 T DE 591199 T DE 821981 T EP 0591199 A EP 0821981 A JP 2933389 B JP 6506124 T US 6004291 A WO 9203178 A US 5425711 A US 5370616 A US 5395332 A US 5658251 A US 5720724 A	04-06-1996 07-03-1995 08-06-1993 20-10-1992 01-03-1992 10-04-1997 02-07-1998 26-11-1998 03-11-1994 22-10-1998 13-04-1994 04-02-1998 09-08-1999 14-07-1994 21-12-1999 05-03-1992 20-06-1995 06-12-1994 07-03-1995 19-08-1997 24-02-1998
WO 9639205 A	12-12-1996	US 5984907 A	16-11-1999
US 5743876 A	28-04-1998	US 5605543 A AU 685575 B AU 1464695 A BR 9507017 A CA 2185146 A EP 0749333 A FI 963537 A WO 9524236 A JP 9504980 T KR 186950 B NO 963777 A	25-02-1997 22-01-1998 25-09-1995 09-09-1997 14-09-1995 27-12-1996 09-09-1996 14-09-1995 20-05-1997 01-04-1999 04-11-1996
WO 9638193 A	05-12-1996	US 5741429 A US 6027863 A AU 5961496 A CA 2220181 A EP 0830168 A	21-04-1998 22-02-2000 18-12-1996 05-12-1996 25-03-1998

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 00/00752

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 743 876 A (SWANSON WILLIAM J) 28 April 1998 (1998-04-28) abstract; figures 1-3 column 6, line 50 -column 7, line 5 column 8, line 47 -column 9, line 32; figures 11-14	1,11,16
A	WO 96 38193 A (CARDIA CATHETER CO) 5 December 1996 (1996-12-05) page 7, line 20 -page 8, line 20 page 30, paragraph 13 -page 31, line 28; figures 6-10	1,11,16

INTERNATIONAL SEARCH REPORT

International Application No.
PCT/US 00/00752

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 A61M25/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 A61M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search phase (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim no.
A	US 5 843 050 A (EVANS SCOTT ET AL) 1 December 1998 (1998-12-01) the whole document	1, 11, 16
A	EP 0 688 576 A (TERUMO CORP) 27 December 1995 (1995-12-27) the whole document	1, 11, 16
A	US 5 702 439 A (EUTENEUER CHARLES L ET AL) 30 December 1997 (1997-12-30) column 8, line 13 - column 9, line 17; figures 1-4	1, 11, 16
A	WO 96 39205 A (EP TECHNOLOGIES) 12 December 1996 (1996-12-12) page 8, line 7 - page 12, line 17; figures 3, 4 abstract	1, 11, 16
-/-		

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubt on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- *B* document member of the same patent family

Date of the actual completion of the international search

19 April 2000

Date of mailing of the international search report

04/05/2000

Name and mailing address of the ISA

European Patent Office, P.O. Box 5018 Patentstein 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2540, Telex 31 651 epo nl
Fax (+31-70) 340-3016


Authorized officer

Jameson, P

0111/666/1111

9566/66 OM

Fig. 5

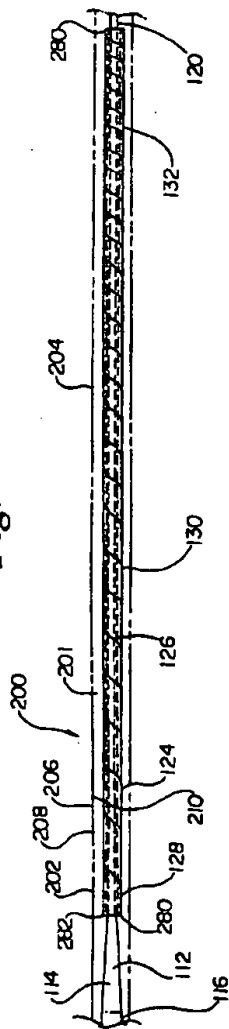

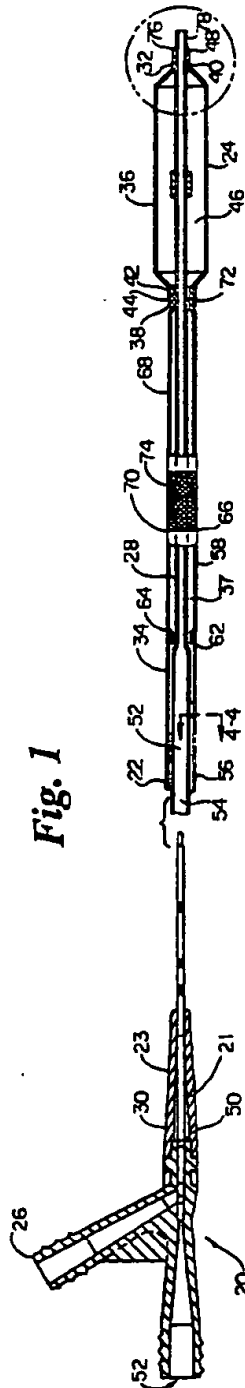


Fig. 1

Fig. 4



Fig. 3


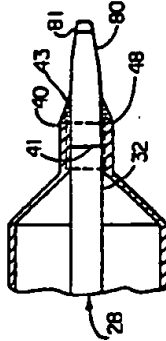


Fig. 2

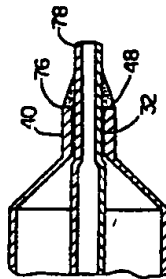

5

32. A catheter assembly according to claim 16, wherein the transition tube is formed from a polymer.

10

15

33. A catheter assembly according to claim 16, wherein the catheter is a catheter having a type selected from the group consisting of a single-operator-exchange type catheter, an over-the wire type catheter, and a fixed-wire type catheter.

20

25

30

35

40

45

50

55

5 inner surface of the transition tube engages the inner tube and the spaced part of the outer
surface of the transition tube engages the outer tube when the catheter assumes a bent
10 configuration in and around the transition tube.

26. A catheter assembly according to claim 16, wherein the transition tube has in
15 order a first end region, an intermediate region, and a second end region, wherein only the
first end region is secured to the inner tube.

27. A catheter assembly according to claim 16, wherein the transition tube is
20 secured to the inner tube proximal of the junction.

28. A catheter assembly according to claim 27, wherein the transition tube is
25 secured to the inner tube using an adhesive.

29. A catheter assembly according to claim 16, wherein the spiral cut is formed
30 using a laser beam.

30. A catheter assembly according to claim 16, wherein the transition tube is
35 formed from a stainless steel hypotube.

31. A catheter assembly according to claim 30, wherein the hypotube is heat-
40 treated.

5

20. A catheter assembly according to claim 18, wherein the pitch of the spiral cut decreases at a variable rate along the spiral cut portion toward the distal end of the transition tube.

10

15

21. A catheter assembly according to claim 16, wherein the inner tube has in order a proximal portion, an intermediate portion, and a distal portion, the proximal portion having a first outer diameter, the distal portion having a second outer diameter that is smaller than the first outer diameter, and the intermediate portion having an outer diameter that tapers from the first outer diameter to the second outer diameter.

20

25

22. A catheter assembly according to claim 21, wherein the transition tube is secured to the intermediate portion of the inner tube.

30

23. A catheter assembly according to claim 21, wherein the intermediate portion of the inner tube has a bump and the transition tube frictionally secured thereon.

35

40

24. A catheter assembly according to claim 16, wherein the side wall of the transition tube defines an inner surface and an outer surface, wherein at least a spaced part of the inner surface is spaced from the inner tube and at least a spaced part of the outer surface is spaced from the outer tube, at least when the catheter assumes a substantially straight configuration in and around the transition tube.

45

50

25. A catheter assembly according to claim 24, wherein the spaced part of the

55

5 joined together at a junction, the distal outer section being more flexible than the proximal outer section;

10 an elongate inner tube having a proximal end and a distal end with a guide wire lumen extending therethrough, the inner tube being co-axially disposed within the lumen of the outer tube to form an annular lumen therebetween; and

15 a transition tube co-axially disposed within the annular lumen between the inner and outer tubes, the transition tube having a proximal end and a distal end with a side wall extending from the proximal end to the distal end defining a lumen therethrough, the proximal end of the transition tube being located proximal of the junction and the distal end of the transition tube being located distal of the junction, the side wall of the transition tube having a spiral cut therethrough along at least a portion thereof.

25
30 17. A catheter assembly according to claim 16, wherein the flexibility of the transition tube gradually changes along the spiral cut portion of the transition tube.

35 18. A catheter assembly according to claim 17, wherein the spiral cut has a pitch that decreases along the spiral cut portion toward the distal end of the transition tube.

40 19. A catheter assembly according to claim 18, wherein the pitch of the spiral cut decreases at a substantially constant rate along the spiral cut portion toward the distal end of the transition tube.

5

an elongate inner member having a proximal end and a distal end, the inner member being co-axially disposed within the lumen of the outer tube to form an annular lumen therebetween; and

10

a transition tube co-axially disposed within the annular lumen between the inner member and outer tube, the transition tube positioned adjacent at least a portion of the transition in flexibility of the shaft, and having a spiral cut therethrough along at least a portion thereof.

15

20

12. A catheter assembly according to claim 11, wherein the transition tube has in order a first end region, an intermediate region, and a second end region, wherein only the first end region is secured to the shaft.

25

13. A catheter assembly according to claim 12, wherein the second end region is more flexible than the first end region.

30

14. A catheter assembly according to claim 12, wherein the first end region is secured to the shaft proximate the transition in flexibility of the shaft.

35

15. A catheter assembly according to claim 11, wherein the transition tube is formed from a stainless steel hypotube.

40

16. A catheter assembly, comprising:

an elongate outer tube having a proximal outer section and a distal outer section

45

50

55

5

more flexible than the first end region.

10

6. A catheter assembly according to claim 4, wherein the first end region is secured to the shaft proximate the transition in flexibility of the shaft.

15

7. A catheter assembly according to claim 6, wherein the first end region is secured to the shaft at the transition in flexibility with the intermediate region and the second end region extending distally therefrom.

20

25

8. A catheter assembly according to claim 1, wherein the transition tube has a region that is spaced from the shaft when the shaft is in a substantially straight configuration, and engaged with the shaft when the catheter is in a bent configuration.

30

9. A catheter assembly according to claim 1, wherein the transition tube is a stainless steel hypotube.

35

10. A catheter assembly according to claim 1, wherein the transition tube is a polymeric tube.

40

11. A catheter assembly, comprising:
an elongate outer tube having a transition in flexibility;

45

50

55

5

What is claimed:

10

15

1. A catheter assembly comprising:

an elongate shaft having a transition in flexibility; and

a transition tube disposed about the shaft and having a spiral cut along at least a portion of the transition tube, the transition tube positioned adjacent at least a portion of the transition in flexibility of the shaft.

20

2. A catheter assembly according to claim 1, wherein the shaft has in order a

proximal region, a transition region and a distal region, wherein the proximal region has a first flexibility, the distal region has a second flexibility that is greater than the first flexibility, and the transition region provides the transition in flexibility from the first flexibility to the second flexibility.

25

30

3. A catheter assembly according to claim 1, wherein the shaft has a proximal

region and a distal region, wherein the proximal region has a first flexibility and the distal region has a second flexibility that is greater than the first flexibility, the proximal region and distal region joined at a junction to provide the transition in flexibility.

35

40

4. A catheter assembly according to claim 1, wherein the transition tube has in order a first end region, an intermediate region, and a second end region, wherein only the first end region is secured to the shaft.

45

5. A catheter assembly according to claim 4, wherein the second end region is

50

55

Claims

5

10

15

20

25

30

35

40

45

50

55

5 may engage the outer tube 200 when the catheter is bent. To help reduce any damage that
may result, a radius cut 280 may be provided to round the edge proximal end 282. This may
10 be accomplished by cutting, grinding, filing or any other means that provides a smoother less
obtrusive edge to the proximal end of the end coil 282. For similar reasons, a radius cut may
5 also be provided at the distal end of the transition member 112.

15 Having thus described the preferred embodiments of the present invention, those of
skill in the art will readily appreciate that yet other embodiments may be made and used
within the scope of the claims hereto attached.

5 bond or a thermal weld. Because the proximal outer section 202 is preferably stiffer than the
distal outer section 204, there is a transition in flexibility in the outer tube 200 at junction
10 210. This transition in flexibility may be rather abrupt, as provided by an adhesive lap-joint
or a thermal butt-joint, or may be more gradual, as provided by a heat flow process or an
5 interrupted layer extrusion process. The proximal end of the transition member 124 may be
located proximal of the junction 210 in the outer tube 200, and the distal end may be located
15 distal of the junction 210. Thus, the transition member 124 may span or bridge at least part
of the transition in flexibility (i.e. junction 210) of the outer tube 200.

20 The transition member 124 is preferably co-axially disposed within the annular lumen
between the inner member 112 and the outer tube 200. It is recognized, however, that the
10 transition member may be positioned inside the inner member 112 (if the inner member 112
is tubular having an inner lumen) or outside of the outer tube 200. The transition member
25 124 is preferably longitudinally positioned adjacent to at least a portion of the transition in
flexibility of the inner member 112, the outer tube 200, or both.

30 Like above, the transition member may be secured to the intermediate portion 114 of
the inner member 112. To help secure the transition member 124 to the inner member 112,
15 the proximal portion may be sized so that the transition member 124 can be friction fit over
the intermediate portion 114. An adhesive may also be used to secure the transition member
35 124 to the intermediate portion 114 of the inner tube 112.

40 Finally, a radius cut 280 may be provided in the transition member 124 to remove
any sharp edges that may exist at the proximal end and distal end of transition member 124.

45 It is recognized that spiral cut 126 may result in a sharp edge or point at the proximal end
282 or termination of the spiral cut of the transition member 124. This sharp edge or point

5 The progressive arrangement of more flexible materials as the catheter proceeds distally provides an optimal level of pushability and trackability to navigate tortuous vasculature.

10 The proximal outer tube 202 may correspond to the proximal outer tube 56 of the embodiment shown in FIG. 1. Thus, the proximal outer tube 202 may be made of nylon, a
5 polyamide, such as DURETHAN available from Bayer, a DURETHAN braid,
15 polyetheretherketone (PEEK) braid or any other suitable material or combination of materials. Alternatively, the proximal outer tube 202 may correspond to the midshaft section 58 of the embodiment shown in FIG. 1. Thus, the proximal outer tube 202 may be made
20 from a polyamide, such as CRISTAMID available from Elf Atochem, having a durometer of about 81D, and may have an outside diameter ranging from .040 inches to .045 inches with a
10 wall thickness ranging from .0028 inches to .0044 inches.

25 The distal outer section 204 may have a proximal end 206 that extends distally from the distal end 208 of the proximal outer section 202. The distal outer section 204 preferably
30 has a stiffness that is less than that of the proximal outer section 202. The distal outer section 204 may correspond to the midshaft section 58 of the embodiment shown in FIG. 1. Thus,
15 the distal outer section 204 may be made from a polyamide, such as CRISTAMID available from Elf Atochem, having a durometer of about 81D, with an outside diameter ranging from
35 .040 inches to .045 inches with a wall thickness ranging from .0028 inches to .0044 inches. Alternatively, the distal outer section 204 may correspond to the distal outer section 68 of the
40 embodiment shown in FIG. 1. Thus, the distal outer section 204 may be made from a
20 polyether block amide (PEBAX) having a durometer of about 70D.

45 The distal end 208 of the proximal outer section 202 is preferably joined to the proximal end 206 of the distal outer section 204 at a junction 210 using a urethane adhesive

5 straight configuration, but become in contact with at least parts of the inner member 112 when the catheter is in a bent configuration.

10 It is contemplated that the first end region 128, the second end region 132, and/or the intermediate region 130 may be secured to the inner member 112. It is also contemplated
5 that there may be a space between the inner member 112 and the first end region 128, the second end region 132 and/or the intermediate region 130. It is also contemplated that there
15 may not be a space between the inner member 112 and the first end region 128, the second end region 132 and/or the intermediate region 130.

20 The first end region 128 of the transition member 124 may be secured to the inner member 112 proximate the transition in flexibility of the inner member 112, with the
10 intermediate region 130 and the second end region 132 extending distally therefrom without attachment to the inner so that these portions are free floating and can flex without restraint.
25 The length of the transition member 124 is preferably selected so that the second end region 132 extends distal of the transition in flexibility in the inner member 112. In this
30 configuration, the transition member 124 bridges or overlaps at least part of the transition in flexibility of the inner member 112. Preferably, the transition member 124 is formed from a
15 heat treated stainless steel hypotube, but could be manufactured from another alloy, such as nitinol, or a polymeric material.
35

40 As shown in FIG. 5, the catheter shaft may also include an outer tube 200 having a lumen 201 extending therethrough. The inner tube 112 and outer tube 200 are preferably co-
20 axially disposed forming the annular lumen 201 therebetween. The outer tube 200 has a relatively stiff proximal outer section 202 and a relatively flexible distal outer section 204.
45

5 To help provide a transition in flexibility, the transition member 124 has a spiral cut
126 or the like in the side wall thereof. The spiral cut preferably extends through the side
10 wall of the transition member 124. The pitch of the spiral cut 126 may be varied along the
length of the transition member 124 to provide a relatively smooth transition from the
5 relatively stiff proximal portion 116 to the more flexible distal portion 120 of the inner
member 112. The pitch may be varied at a constant or variable rate, depending on the
15 desired flexibility characteristics of the transition member 124. The pitch may be held
constant over a portion of the length of the transition member 124 and varied over other
20 portions of the length to achieve desired flexibility for a particular use. In a preferred
10 embodiment, the spiral cut has a pitch at the proximal end of about 0.11 inches, a pitch in the
distal end of about 0.03 inches, and a constant rate of change over its length. It is recognized
25 that pitch can be varied depending upon a particular application with a preferred proximal
end pitch of up to 0.3 inches and a distal end pitch of down to 0.01 inches. The pitch is
30 defined herein as the axial distance between an adjacent (360°) spiral cut. In general, pitch is
15 selected so that the flexibility of the transition member in combination with shaft provides a
smooth transition in flexibility with no abrupt changes. Spiral cut 126 is preferably formed in
35 the transition member 124 using a laser.

The transition member 112 has a first end region 128, an intermediate region 130, and
40 a second end region 132, wherein only the first end region 128 is secured to the inner
20 member 112. The intermediate region 130 and the second end region 132 are left floating
relative to the inner member 112. The intermediate region 130 and the second end region
45 132 are preferably spaced from the inner member 112 when the catheter is in a substantially

5 The illustrative catheter shaft of Fig. 5 includes an inner member 112 that has a proximal portion 116, an intermediate portion 114, and a distal portion 120. It is contemplated that the inner member 112 may be a guide wire, an inner tubular member, or
10 any other suitable device or structure. In the embodiment shown, the proximal portion 116 has a first outer diameter, and the distal portion 120 has a second outer diameter that is smaller than the first outer diameter. The intermediate portion 114 has an outer diameter that tapers from the first outer diameter to the second outer diameter. The tapered intermediate portion 114 provides a transition in flexibility from the stiffer proximal portion 116 to the more flexible distal portion 120 of the inner member 112. Preferably, the inner member 112
15 is an inner tubular member having a guide wire lumen extending therethrough, and is preferably made from a polymeric material, such as polyethylene, or a multilayer extrusion having a polyethylene inner and PEBAX outer layer. It is recognized that the tube may be un-reinforced polymeric tube, a reinforced polymeric tube, or any other suitable material or element.

15 A transition member 124 may be used in conjunction with the inner member 112, or in conjunction with the inner member 112 and the outer member 200, as more fully described below. The transition member 124 is shown co-axially disposed relative to the inner member 112, and longitudinally positioned to bridge or overlap at least part of the transition in flexibility of the inner member 112. In preferred embodiments, the transition member has a
20 length of about 2 inches. This length can, however, be varied for specific applications, with preferred lengths of about 0.5 inches to about 4 inches, more preferably, about 1.5 inches to about 2.5 inches.

5 outer diameter of the polyethylene distal tip 80 distally tapers from a larger outer diameter to a smaller outer diameter.

10 In another preferred embodiment, incorporating a soft tip as described above, the last 1/2 to 1 mm of the tip at its distal end is made of a different material from the tip material to
5 form a tip extension. In particular, the last 1/2 to 1 mm is made from a material which is
15 more durable relative to the softer tip material. In particular, the more durable material will resist deforming or tearing when in use, such as tracking tortuous anatomy or through a placed stent. For example, this last 1/2 to 1 mm may be manufactured from Marlex high-
20 density polyethylene having a 63D durometer which improves the integrity of the tip portion
10 at its distal most end 81.

25 Referring now to Fig. 5 there is depicted a partial cross section side view of yet another embodiment of the present invention, including a spiral cut transition member that bridges or overlaps a transition in flexibility in the catheter shaft. The transition member
30 may be used to provide a strain relief to a transition in flexibility along a length of an elongated member. More preferably, the transition member may be used to provide a strain
15 relief to a transition in flexibility along a length of a coaxial catheter having an elongated inner member and a co-axially disposed outer member as depicted in Fig. 1. As discussed
35 with respect to Fig. 1, numerous transitions in flexibility can be incorporated into a catheter design, such that the junction between the proximal outer 56 and the midshaft section 58 or
40 the junction between the midshaft section 58 and the distal outer section 68. Transitions in flexibility can be included on the inner member also, such as the necking in the diameter of
20 the inner tube 28 in Fig. 1. The transition member of the present invention can be used in
45 conjunction with any such transition in flexibility. Fig. 5 is illustrative of such uses.

5 As the inner tube 28 extends distally through the junction area between the distal end
of the proximal outer section 62 and the proximal end of the midshaft section 64 of the outer
10 tube 28, both the inner and outer diameters of the inner tube 28 will taper from wider
diameters to narrower diameters. Likewise, at the distal end of the inner tube 32, both the
5 inner and outer diameters of the inner tube 28 will once again taper from wider diameters to
15 narrower diameters as the tube extends distally.

As illustrated in Figure 2, in one preferred embodiment, a distal tip 76 is formed on
the distal end of the inner tube 32 where the inner tube 28 distally tapers from a larger outer
20 diameter to a smaller outer diameter. The distal balloon waist 40 is attached to the distal tip
10 76 through a urethane adhesive bond or thermal bond at a bonding area. The area just distal
of the distal waist bond is backfilled with adhesive 43 to provide a smooth transition. The
25 adhesive coating provides for improved adhesion between dissimilar substrates.

The proximal catheter shaft portion is preferably about 35 to 45 inches in length with
30 a preferred length of 42 inches. The midshaft section, if included, can be about 1 to about 3
15 inches in length with a preferred length of 2 inches. The distal outer section having the most
flexibility is preferably about 8 to about 12 inches in length with a preferred length of about
35 10 inches.

In another preferred embodiment, as shown in Figure 3, a polyethylene, polyamide,
40 or block copolymer such as PEBAX distal tip 80 of durometer between about 50D and 70D,
20 preferably about 63D is heat welded or bonded to the distal end of the inner tube 32 with a
durometer of about 63-65D, and the distal balloon waist 40 of the balloon is adhesively or
45 thermally bonded to both the inner and the tip extending therefrom. As shown in Fig. 3, the
joint 41 between the inner and the tip is located under the distal waist of the balloon. The

5 68 having a proximal end 70 and a distal end 72 extends distally from the distal end of the
midshaft section 66 to the distal end of the outer tube 44. This distal outer section 68 is more
10 flexible or has less stiffness than both the proximal outer section 56 and the midshaft section
58. The outer diameter of the distal outer section 68 will taper from about .045 inches at the
15 proximal end 70 to .030 inches at the distal end 72. This distal outer section 68 is made of
polyether block amide (PEBAX) with a durometer of 70D. The tapered distal outer section
preferably has a Gurley value of about 70 to about 90 at its proximal end and about 15 to
20 about 40 at its distal end. Thus, the distal end of the distal outer section 72 will exhibit less
stiffness than the proximal end of the distal outer section 70. The distal end of the midshaft
10 section 66 is joined to the proximal end of the distal outer section 70 with a urethane
adhesive bond or a thermal weld.
25

A Nitinol braid insert 74 with a length of about 1.0" is placed within the proximal end
of the distal outer section 70 to provide strain relief and reduce kinkability at the
30 midshaft/distal outer section junction. This Nitinol braid 74 has a .001" x .005" ribbon.

15 The inner tube 28 is made of polyethylene such as Marlex HDPE or a multilayer
coextrusion with Marlex interior layer and PEBAX outer layer. At the proximal end of the
35 inner tube 30, the inner tube 28 has an outside diameter ranging from 0.022 inches to 0.028
inches and preferably about 0.025 inches, with the inner tube 28 having an inside diameter
40 ranging from 0.016 inches to 0.021 inches for a 0.014 inch guide wire for which this lumen is
20 designed to be compatible with. The inner tube 28 has a wall thickness ranging from .0024
inches to .005 inches and preferably about .0032 inches. The outside diameter to wall
45 thickness ratio must be sufficiently small to minimize the propensity of kinking.

5 DURETHAN available from Bayer, GRILAMID available from EMS-American Grilon, Inc.,
a DURETHAN, GRILAMID, CRISTAMID or CRISTAMID/VESTAMID blend braid or
10 polyetheretherketone (PEEK) braid. The preferred embodiment of PEEK braid is a variable
PIC tube, wherein said PIC varies from about 30 to 100 PIC to give varying flexibility over
5 the length of the proximal outer tube. The PIC preferably varies from about 50 to about 80.
15 The braiding material in the PEEK or DURETHAN (polymer) braid may be made from
stainless steel, or Nitinol (nickel titanium alloy). This proximal outer section 56 will have an
outside diameter ranging from .040 inches to .065 inches with a wall thickness ranging from
20 .0026 inches to .0056 inches. The proximal outer section has a preferred Gurley value of
10 about 700 to about 1300 over its length. A preferred range is about 800 to about 1200.
25 Figure 4 illustrates a cross section view of the proximal outer section having PEEK braid
material as taken along 4-4 of Figure 1. The PEEK braid includes an inner layer, a braid
layer and an outer layer.

30 A midshaft section 58 with a proximal end 64 and a distal end 66 extends distally
15 from the distal end 62 of the proximal outer section 56. The midshaft section 58 has a
stiffness less than that of the proximal outer section 56. The midshaft section 58 is
35 preferably made from a polyamide, such as CRISTAMID available from Elf Atochem,
having a durometer of about 81D. A preferred Gurley value for the midsection is about 350
to about 500, with a range of 400 to 450 preferred. This midshaft section 58 will have an
40 20 outside diameter ranging from .040 inches to .045 inches with a wall thickness ranging from
.0028 inches to .0044 inches.

45 The distal end of the proximal outer section 62 is joined to the proximal end of the
midshaft section 64 with a urethane adhesive bond or a thermal weld. A distal outer section

5 A radiopaque marker band 50 is adhesively secured with cyanoacrylate to the inner
tube 28 at a point underneath the balloon body 36. Alternatively, the marker band may be
10 swaged onto the outer surface of the inner. The inner tube 28 defines a guide wire lumen 54
which provides a passage for a guide wire (not shown). The outer tube 34 defines an annular
5 inflation lumen 37 which is in fluid communication with the interior of the balloon 46.

15 As previously stated, the catheter of the present invention includes an outer tube
which may have multiple segments including a relatively stiff proximal outer section, a mid-
shaft section of lesser stiffness, and a tapering distal outer section of the least stiffness. The
20 progressive arrangement of more flexible materials as the catheter proceeds distally provides
10 an optimal level of pushability and trackability to navigate tortuous vasculature. The
flexibility of the sections of the outer tubular member were tested utilizing a Gurley bending
25 resistance tester, Part No. 4171-DT, as manufactured by Precision Instruments, Troy, New
York. The apparatus consists of a balanced pendulum or pointer which is center-pivoted and
30 can be weighted at three points below its center. The pointer moves freely in both the left
15 and right directions. A sample of specific size is attached to a clamp, which in turn is located
in one of several positions on a motorized arm which also moves left and right. During the
35 test, the sample is moved against the top edge of the vane, moving the pendulum until a
sample bends and releases it. The test is run in two steps, first to the left and then to the right.
40 The scale reading is measured in each direction and the results are averaged. The instrument
20 provides a relative flexibility measurement between the components of the outer tubular
member as detailed below to achieve improved trackability and pushability.

45 The outer tube 34 has a relatively stiff, proximal outer section 56 with a proximal end
60 and a distal end 62. The proximal outer tube may be made of nylon, a polyamide, such as

5 not necessarily to scale, depict selected embodiments and are not intended to limit the scope of the invention.

10 Examples of constructions, materials, dimensions and manufacturing processes are provided for selected elements. All other elements employ that which is known to those skilled in the field of the invention. Those skilled in the art will recognize that many of the
15 examples provided have suitable alternatives which may also be utilized.

Referring now to the drawings, Fig. 1 is a cross-sectional view of an over-the-wire balloon catheter showing a preferred embodiment of the present invention. The balloon catheter 20 includes a shaft assembly 22 and a balloon assembly 24 connected proximate its
20 distal end. A conventional OTW-type manifold assembly 26 is connected to the proximal end of the shaft assembly 22. The shaft assembly 22 includes an inner tube 28 having a proximal end 30 and a distal end 32. The proximal end of the shaft assembly 22 extends into a manifold assembly 26 adhesively bonded to the shaft assembly 22. A polyurethane strain
25 relief 23 is snap-fit to the manifold assembly 26, and the shaft assembly 22 extends into the manifold assembly 26 through the polyurethane strain relief 23. An outer tube 34 is co-axially disposed about the inner tube 28 to define an annular inflation lumen 37.
30

35 The balloon assembly 24 includes a balloon body portion 36 with a proximal balloon waist 38 and a distal balloon waist 40. The proximal balloon waist 38 is connected to the outer tube 34 near its distal end 42 by means of an adhesive 44, or alternatively, is thermally
40 bonded. The distal balloon waist 40 is connected to the inner tube 28 near its distal end 32 by means of an adhesive bond 48 or a thermal bond such that the interior of the balloon 46 is in fluid communication with the annular inflation lumen 37.
45

engage at least part of the inner member and outer tube when the catheter is provided in a bent configuration.

Brief Description of the Drawings

Other objects of the present invention and many of the attendant advantages of the present invention will be readily appreciated as the same becomes better understood by reference to the following detailed description when considered in connection with the accompanying drawings, in which like reference numerals designate like parts throughout the figures thereof and wherein:

Fig. 1 is a cross-sectional view of a catheter showing a preferred embodiment of the present invention;

Fig. 2 is a partial cross-sectional view of a preferred embodiment distal tip area of the catheter of Fig. 1, illustrating the tip formed from the inner;

Fig. 3 is a partial cross-sectional view of a second preferred embodiment of distal tip area of the catheter of Fig. 1, illustrating the transition between the stiffer distal end of the inner tube and the more flexible distal tip;

Fig. 4 is a cross section view of Fig. 1 taken along line 4-4; and

Fig. 5 is a partial cross sectional view of another embodiment of the present invention, including a spiral cut transition member bridging a transition in flexibility in the catheter shaft.

Detailed Description of the Preferred Embodiments

The following detailed description should be read with reference to the drawings in which like elements in different drawings are numbered identically. The drawings, which are

5 cut along its length. Also, the pitch of the spiral cut may be varied at a constant or variable rate, depending on the desired flexibility characteristics of the transition member.

10 The outer tube may have a proximal outer section and a distal outer section joined together at a junction, with the distal outer section more flexible than the proximal outer section. The proximal end of the transition member is preferably located proximal of the junction and the distal end is preferably located distal of the junction. That is, the transition member preferably spans or bridges at least part of the transition in flexibility (i.e., junction) of the outer tube.

20 As previously stated, the inner member may also have a transition in flexibility. In one embodiment, the inner member has a proximal portion, an intermediate portion, and a distal portion, wherein the proximal portion has a first outer diameter, the distal portion has a second outer diameter that is smaller than the first outer diameter, and the intermediate portion has an outer diameter that tapers from the first outer diameter to the second outer diameter. The tapered intermediate portion corresponds to the transition in flexibility of the inner member.

35 In a preferred embodiment, the transition member is secured to or proximate to the intermediate portion of the inner member and extends distally therefrom. To help secure the transition member to the inner member, the transition member may have a proximal portion sized so that the transition member can be friction fit over a portion of the tapered portion of the inner tube. An adhesive may also be used to secure the transition member to the intermediate portion of the inner tube. In a preferred embodiment adhesive is applied proximate the proximal end of the transition member only so that the transition member distal of the adhesive is free-floating. As discussed above, the transition member may

5 above, the transition member may bridge, extend across, or overlap at least part of the transition in flexibility of the catheter shaft.

10 As previously stated, in preferred embodiments, the transition member is part of or affixed to a co-axial type catheter that includes an elongate outer tube having a transition in
5 flexibility and an elongate inner member. In one embodiment, the inner member is co-axially disposed within the lumen of the outer tube to form an annular lumen therebetween.
15 The transition member is then preferably affixed to the inner member so that it extends coaxially therewith. The transition member extends axially from a point at or proximal of
20 the transition in flexibility of the outer tube to a point at or distal of the transition in flexibility of the outer tube. It is contemplated that the inner member may be a inner tubular
10 member having a guide wire lumen extending therethrough. Alternatively, it is contemplated that the inner member may be a guide wire or any other suitable device or structure. It is
25 further recognized that the inner member can include a transition in flexibility. The transition member can be mounted on the inner member, or affixed to the outer member at an
30 axial position so that the transition member proximal end is at or proximal to the transition flexibility and the distal end is at or distal of the transition in flexibility to provide kink
15 resistance for the inner tubular member.
35

Preferably, the transition member is co-axially disposed within the annular lumen
40 between the inner member and outer tube. It is recognized, however, that the transition
20 member may be positioned inside the inner member (if the inner member is tubular having an inner lumen) or outside of the outer tube. The transition member is preferably positioned
45 adjacent to at least a portion of the transition in flexibility of the catheter shaft, and is spiral

5 these members. In a preferred over-the-wire catheter, an inner tubular member extends coaxially with the lumen of the outer tubular member and the transition member is affixed to the inner tubular member at an axial location proximate the junction in outer segments.

10 The flexibility of the transition member preferably increases along its length. This can be accomplished by providing a spiral cut or the like which extends through the side wall of the transition member. The spiral cut provides flexibility to the transition member, and if the pitch of the spiral cut is changed over the length, can provide a relatively smooth transition in flexibility from the relatively stiff proximal section to the relatively flexible distal section of the catheter while providing increased kink resistance. The transition member may be made from a stainless steel hypotube or other metallic tube, such as nitinol, an un-reinforced polymeric tube, a reinforced polymeric tube, or any other suitable material or element.

15 The transition member preferably has a first end region, an intermediate region, and a second end region, wherein only the first end region is secured to the catheter shaft. The intermediate region and the second end region are preferably left floating relative to the catheter shaft. In a preferred embodiment, the intermediate region and/or the second end region are radially spaced from the shaft when the catheter is in a substantially straight configuration, and are in engagement with at least part of the catheter shaft when the catheter is in a bent configuration.

20 The first end region of the transition member is secured to the shaft proximate the transition of flexibility of the shaft, with the intermediate region and the second end region extending distally therefrom. The length of the transition member is preferably sufficient so that the second end region is distal of the transition in flexibility of the shaft. Thus, like

5 would be desirable, therefore, to provide an intravascular catheter that has a more gradual transition in flexibility along its length.

10 Summary of the Invention

The present invention overcomes many of the disadvantages of the prior art by
5 providing a transition member that transitions or varies the stiffness of a catheter from a stiffer more pushable proximal section to a more flexible and trackable distal section, while
15 reducing kinkability in the transition. The transition member preferably has a spiral cut provided therein over at least a portion of its axial length to increase the flexibility of the transition member. The pitch of the spiral cut is varied to facilitate a gradual transition in
20 flexibility along the catheter as supported by the transition member. It is contemplated that the transition member may be used in conjunction with all types of catheters including, but not limited to, single-operator-exchange type catheters, over-the wire type catheters, and/or
25 fixed-wire type catheters.

30 In one illustrative embodiment of the present invention, the transition member is used in conjunction with a catheter or other device that has a relatively stiff proximal section and a relatively flexible distal section. The junction between the stiffer proximal section and the
35 more flexible distal section provides a transition in flexibility along the length of the catheter. Preferably, the transition member is co-axially disposed relative to the catheter shaft or other device, and is longitudinally positioned to bridge, extend across, or overlap at least part of
40 the junction of the stiffer proximal section and the relatively flexible distal section. In a preferred embodiment, the transition member is included on a catheter having an outer tubular member which has a proximal stiff segment and a distal more flexible segment with
45 the transition member extending both distally and proximally from the junction between

5 Several characteristics that are important in intravascular catheters include pushability, trackability and crossability. Pushability refers to the ability to transmit force from the proximal end of the catheter to the distal end of the catheter. Trackability refers to
10 the ability to navigate tortuous vasculature. Finally, crossability refers to the ability to navigate the balloon catheter across narrow restrictions in the vasculature.

15 To maximize pushability, some prior art catheters incorporate a stainless steel outer tube (also referred to as a hypotube) on the proximal shaft section and a polymeric distal shaft section. One limitation of such a construction is that hypotubing is often prone to kinking. To reduce the likelihood of kinking, some prior art catheters use a relatively stiff
20 polymer (e.g., composite) or reinforced polymer in the proximal shaft section.

25 The trackability of a particular catheter design is analyzed in terms of the trackability of the distal portion of the catheter, as this portion must track the guidewire through small tortuous vessels to reach the stenosed area to be treated. A more flexible distal portion has been found to improve trackability. Therefore, to maximize pushability, the catheter should
30 have a relatively stiff proximal section. To maximize trackability, the catheter should have a relatively flexible distal section.

35 A limitation of this basic structure is that kinking can occur at the joint between the relatively stiff proximal shaft section and the relatively flexible distal shaft section. To reduce the likelihood of kinking, some prior art catheters use one or more tubular sections of
40 intermediate flexibility between the relatively stiff proximal section and the relatively flexible distal section to provide a more gradual transition in flexibility therebetween. While this approach provides some benefit, the resulting transition in flexibility is often step wise,
45 and can still be susceptible to kinking at the junctions of the various intermediate sections. It

CATHETER WITH SPIRAL CUT TRANSITION MEMBER

This application is a continuation-in-part of co-pending U.S. Patent Application Serial No. 08/950,864, filed October 15, 1997, entitled "Over-The-Wire Catheter With Improved Trackability".

Technical Field

This invention relates to the field of intravascular medical devices, and more particularly, to intravascular catheters that use a relatively stiff proximal section and a more flexible distal section for improved pushability, trackability and crossability.

Background of the Invention

Intravascular diseases are commonly treated by relatively non-invasive techniques such as percutaneous transluminal angioplasty (PTA) and percutaneous transluminal coronary angioplasty (PTCA). These therapeutic techniques are well known in the art and typically involve the use of a balloon catheter with a guide wire, possibly in combination with other intravascular devices. A typical balloon catheter has an elongate shaft with a balloon attached proximate the distal end and a manifold attached to the proximal end. In use, the balloon catheter is advanced over the guide wire such that the balloon is positioned adjacent a restriction in a diseased vessel. The balloon is then inflated and the restriction in the vessel is opened.

There are three basic types of intravascular catheters for use in such procedures including fixed-wire catheters, over-the-wire (OTW) catheters and single-operator-exchange (SOE) catheters. The general construction and use of FW, OTW and SOE catheters are all well known in the art.

Description

5

10

15

20

25

30

35

40

45

50

55

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NI	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification ⁷ : A61M 25/00</p>	<p>A1</p>	<p>(11) International Publication Number: WO 00/45885 (43) International Publication Date: 10 August 2000 (10.08.00)</p>
<p>(21) International Application Number: PCT/US00/00752 (22) International Filing Date: 12 January 2000 (12.01.00) (30) Priority Data: 09/241,995 2 February 1999 (02.02.99) US (71) Applicant: SCIMED LIFE SYSTEMS, INC. (US/US); One SciMed Place, Maple Grove, MN 55311-1566 (US). (72) Inventors: LARSON, Christopher, R.; 435 Desnoyer Avenue, St. Paul, MN 55104 (US). KORNKVEN, Angela, J.; 4345 Merrimac Lane, #9, Plymouth, MN 55446 (US). (74) Agents: CROMPTON, David, M. et al.; Crompton, Seager & Tufte, LLC, Suite 895, 331 Second Avenue South, Minneapolis, MN 55401-2246 (US).</p>		<p>(81) Designated States: CA, JP, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published With international search report.</p>
<p>(54) Title: CATHETER WITH SPIRAL CUT TRANSITION MEMBER</p> <div data-bbox="349 1144 1161 1333"> </div> <p>(57) Abstract</p> <p>A spiral cut transition member (124) is disclosed for controlling the transition in stiffness of a catheter from a stiffer more pushable proximal section (116) to a more flexible and trackable distal section (120) and for increasing kink resistance. The transition member has a spiral cut (126) provided therein to vary the flexibility of the transition member over its length. The pitch of the spiral cut can be varied to facilitate a gradual transition in flexibility along the catheter. The transition member may be used in conjunction with any type of catheter including single-operator-exchange type catheters, over-the wire type catheters, and/or fixed-wire type catheters.</p>		



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification: A61M 25/00	A1	(11) International Publication Number: WO 00/45885 (43) International Publication Date: 10 August 2000 (10.08.2000)
(21) International Application Number: PCT/US00/00752 (22) International Filing Date: 12 January 2000 (12.01.2000) (30) Priority Data: 09/241,995 02 February 1999 (02.02.1999) US (60) Parent Application or Grant SCIMED LIFE SYSTEMS, INC. [/]; O. LARSON, Christopher, R. [/]; (). KORNKVEN, Angela, J. [/]; (). CROMPTON, David, M. ; ().		Published
(54) Title: CATHETER WITH SPIRAL CUT TRANSITION MEMBER (54) Titre: CATHÉTER A ÉLÉMENT DE TRANSITION A DÉCOUPE EN SPIRALE (57) Abstract <p>A spiral cut transition member (124) is disclosed for controlling the transition in stiffness of a catheter from a stiffer more pushable proximal section (116) to a more flexible and trackable distal section (120) and for increasing kink resistance. The transition member has a spiral cut (126) provided therein to vary the flexibility of the transition member over its length. The pitch of the spiral cut can be varied to facilitate a gradual transition in flexibility along the catheter. The transition member may be used in conjunction with any type of catheter including single-operator-exchange type catheters, over-the wire type catheters, and/or fixed-wire type catheters.</p> (57) Abrégé <p>Cette invention a trait à un élément de transition à découpe en spirale (124) permettant d'agir sur la transition en matière de rigidité d'un cathéter d'une section proximale pouvant être poussée et plus rigide (116) à une section distale pouvant être suivie et plus souple (120), cet élément permettant également de renforcer la résistance au vrillage. Cet élément de transition renferme une découpe en spirale (126) destinée à modifier sa souplesse sur toute sa longueur. Le pas de la découpe en spirale peut varier afin de faciliter une transition graduelle en matière de flexibilité le long du cathéter. Il est possible d'utiliser cet élément de transition avec n'importe quel type de cathéter, au nombre desquels, des cathéters du type à échange par opérateur unique, du type sur le fil-guide et/ou du type à fil-guide fixé.</p>		